

GENESEE COUNTY ROAD COMMISSION
Invitation to Bid
ITEM #115 – CONCRETE REPLACEMENT

ADDENDUM I

FROM: Genesee County Road Commission – Purchasing Office

SENT: Thursday, May 5, 2022

Genesee County Road Commission Purchasing Office has issued an addendum for Concrete Replacement that was originally issued on April 26, 2022.

DEADLINE

May 10, 2022 @ 11:00 AM E.T.

Please review the attached information and take this addendum information into account if you are responding to this solicitation.

Please indicate this Addendum I in your Bid. Failure to acknowledge all addenda may be cause for rejection of bid.

Company Name

Date

Name

Signature

Thank you for your participation.

Sincerely,
Stephanie Jaeger
Purchasing Administrator

GENESEE COUNTY ROAD COMMISSION
Invitation to Bid
ITEM #115 – CONCRETE REPLACEMENT

ADDENDUM I

General –

- It is stated in your RFP that the contractor must obtain all required permits, please clarify the follow:
 - Is a permit required? **No permit required**
 - If a permit is required, what documents we will be submitting, since there are no engineering drawings and/or specification? **No permit required**
 - If a permit is required, what are the fees associated with it? **No permit required**
 - If a permit is required, do you know what is approximately the lead time required to obtain such permits? **No permit required**

- For the North Door Entrance and Brine Tank Approach work items, there is no allowance for the sub-base repair just in case it is needed. We will assume that if this condition arise will be an extra work to be dealt with at that time, is this correct? **Yes, a change order is required for approval.**

- For the Brick Warehouse repair item, it was mentioned in the walkthrough to remove the concrete wall to a minimum of one foot below pavement level. Please provide requirements to repair the asphalt area adjacent to the wall. **Contractor will compact soil. We will fill it with patch.**

- Are we allowed to work on all three areas at the same time? **The brine tank approach & the Maintenance building north door entrance will need to be done at different times. We will need access to the building.**

Maintenance North Door Entrance –

- Rebar size? **5**

- 18” on center? **Yes**

- Heavy duty mesh w/ rebar attached? **Yes**

Brine Tank Approach (*Drawing Attached*) –

- Leave basin? **Yes, work up to/around pad**

- Do we want concrete right up to the pad around the tank? **Yes, we will pull the form around the tank, run concrete up to it. Put expansion joint between pad and building.**

- Rebar at the entrance to garage? **No**


Brick Warehouse –

- How far below grade? **1’**

GENESEE COUNTY ROAD COMMISSION
 Invitation to Bid
 ITEM #115 - CONCRETE REPLACEMENT

ADDENDUM I

BRINE TANK APPROACH
 8 INCH THICK

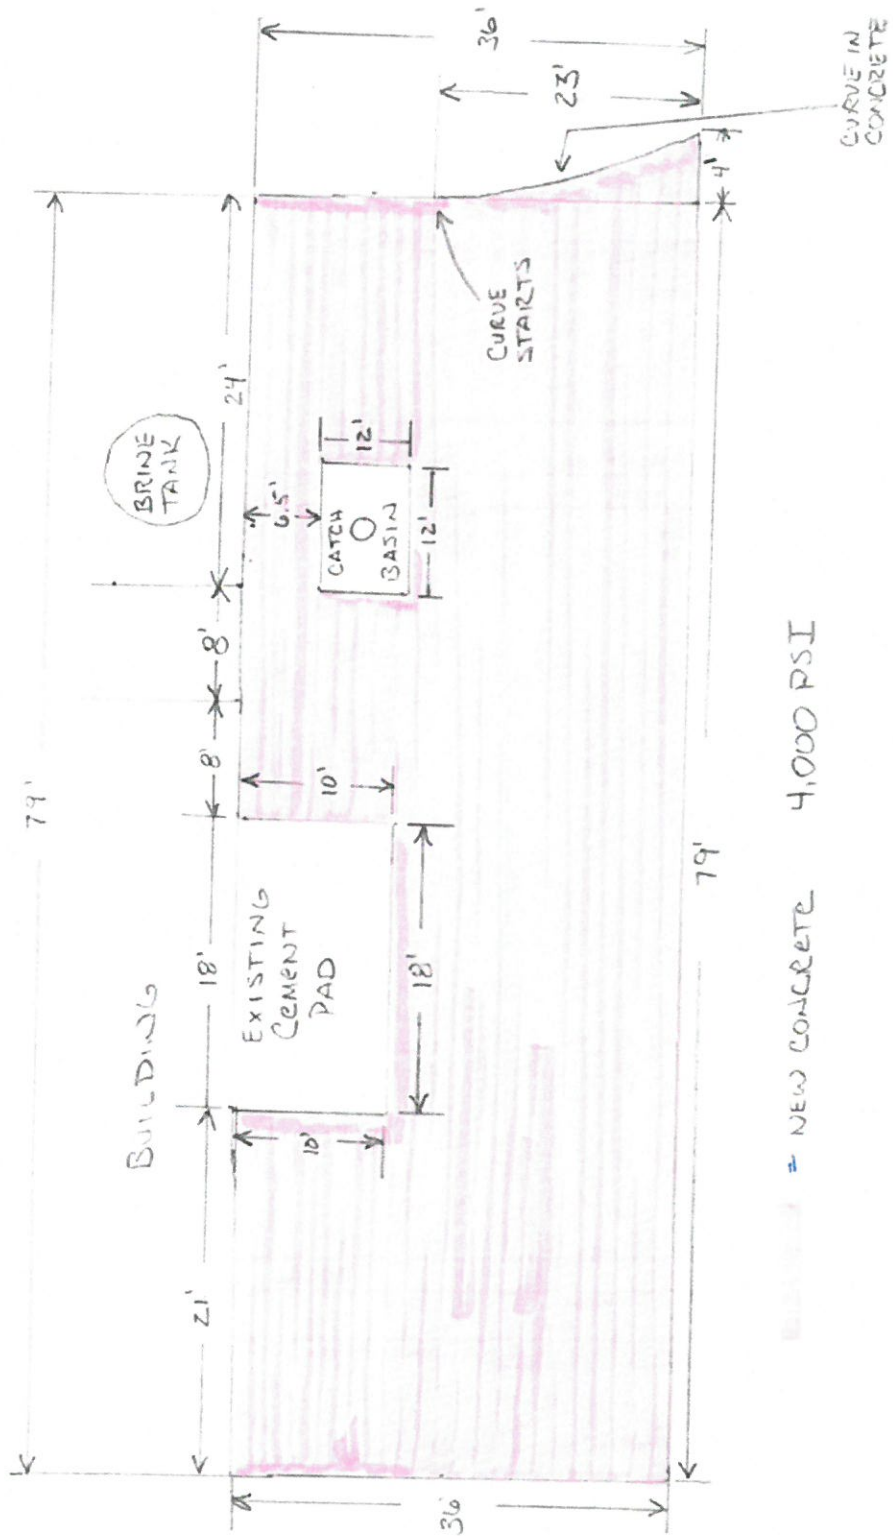

NEW CONCRETE 4,000 PSI